

Borel

Standard Furnaces & Ovens

Switzerland



THERMOLAB FURNACE 1100 °C TL 1100

Definition: Electric chamber furnace, testing furnace, not suitable for intensive industrial use.

Construction: Robustly constructed in folded sheet steel, horizontal opening door for 8 liter model, vertical for 3 liter version.

Insulation: Light fibres for all walls.

Aeration: Air hole in the door, or at the back according to model.

Heating: Heating muffle. Heating interruption on door opening.

Electricity: Single-phase 230 VAC, 50 Hz.


Regulation: Axron Swiss PID temperature controller.

Documentation: CE marking and operating instructions in English.

Delivered with: Removable ceramic sole.



Photos for illustration purposes only

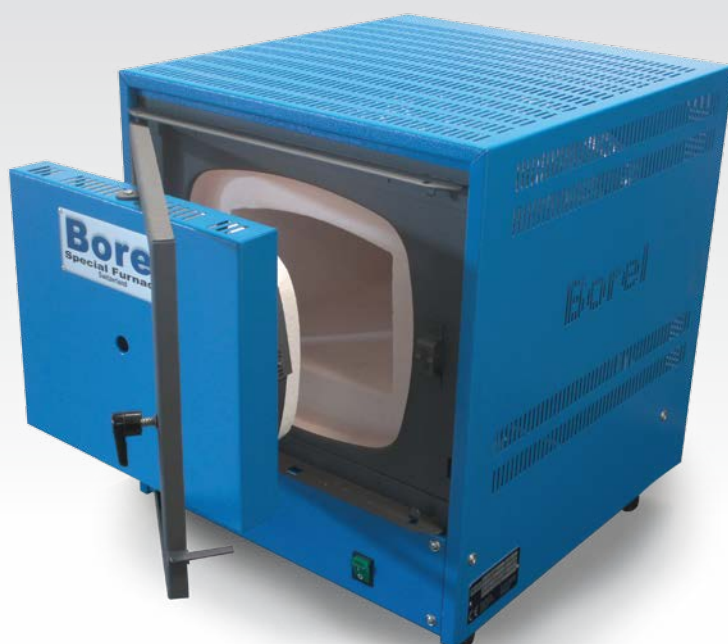

MODEL	ITEM CODE	Int. Vol. (L)	Int. Dim. (WxHxD) (mm)	Ext. Dim. (WxHxD) (mm)	Power (kW)	Weight (kg)
TL 1100-8	G200281	8.2	200 x 133 x 300	440 x 500 x 530	1.8	33
TL 1100-3	G200282	3	120 x 100 x 175	345 x 430 x 500	1.8	17

SOLO Swiss SA

Grandes-Vies, 25 - CH-2900 Porrentruy - Switzerland

Tel : +41 (0)32 756 64 00

Fax : +41 (0)32 465 96 05

borel@soloswiss.com

www.borel.eu

* V 03.02.2017

Specifications subject to change